

<b>Number of contacts</b>	
Type D	32
Type E	48
<b>Contact spacing (mm)</b>	
Type D	5,08
Type E	male connector 5.08 x 5.08 male connector 2.54 x 5.08 female connector 5.08 x 5.08
<b>Working current</b>	6 A max. see current carrying capacity chart
<b>Clearance</b>	
Types D und E	≥ 3.0 mm
Type E male connector row separation 2.54 mm	≥ 1.6 mm
<b>Creepage</b>	≥ 3.0 mm
<b>Working voltage</b>	
The working voltage also depends on the clearance and creepage dimensions of the pcb itself and the associated wiring	according to the safety regulations of the equipment Explanations see chapter 00
<b>Test voltage <math>U_{r.m.s.}</math></b>	1.55 kV
<b>Contact resistance</b>	≤ 15 mΩ for wire wrap and solder connections ≤ 20 mΩ including crimp connections
<b>Insulation resistance</b>	≥ 10 <sup>12</sup> Ω
<b>Temperature range</b>	- 55 °C ... + 125 °C
The higher temperature limit includes the local ambient and heating effects of the contacts under load	
<b>Degree of protection for crimp terminal</b>	IP 20 according to DIN 40 050
<b>Electrical termination</b>	
Male connector	Solder pins for pcb connections Ø 1.0 ± 0.1 mm according to IEC 60 326-3
Female connector	Wrap posts 1 x 1 mm diagonal 1.34-1.45 mm Solder pins for pcb connections Ø 1.0 ± 0.1 mm according to IEC 60 326-3 Angled solder pins 1 x 1 mm for pcb connections Ø 1.6 ± 0.1 mm Solder lugs Crimp terminal 0.09-1.5 mm <sup>2</sup>
<b>Insertion and withdrawal force</b>	32 way ≤ 40 N 48 way ≤ 75 N
<b>Materials</b>	
Mouldings	Thermoplastic resin, glass-fibre filled, UL 94-V0
Contacts	Copper alloy
<b>Contact surface</b>	
Contact zone	Selectively gold plated according to performance level <sup>1)</sup>


<sup>1)</sup> Explanation of performance levels see chapter 00

Mating conditions	see chapter 00
Coding systems	see pages 02.41 and 02.42
Mounting clips	see chapter 00

## Current carrying capacity

The current carrying capacity is limited by maximum temperature of materials for inserts and contacts including terminals. The current capacity curve is valid for continuous, non interrupted current loaded contacts of connectors when simultaneous power on all contacts is given, without exceeding the maximum temperature.

Control and test procedures according to DIN IEC 60 512

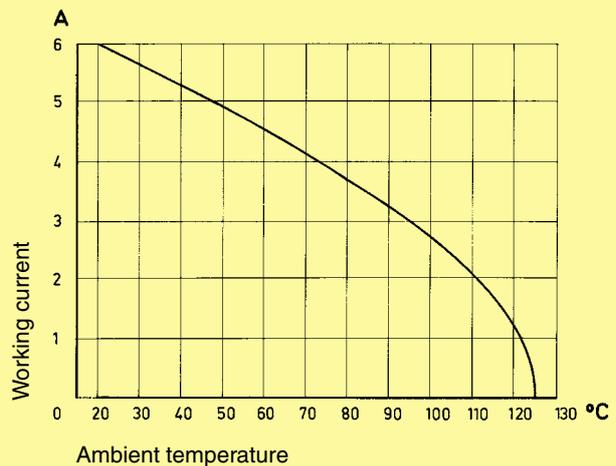

## Fitting the crimp contacts

After crimping the wires onto the contacts with the help of a crimping tool or an automatic crimping machine the contacts should be correctly oriented and inserted into the cavities of the connector moulding in the required configuration. They snap into position and are firmly held in place. A light pull on the wire assures the correct tensile strength of the contact. When using stranded wires with a gauge below 0.37 mm<sup>2</sup> an insertion tool is necessary.

## Removing the crimp contacts

The removal tool is inserted into a slot on the side of the respective crimp cavity. This action compresses the contact retaining spring therefore the contact can then be easily withdrawn using a light pull on the wire. This action will cause no damage to the contact/wire which can be repositioned/refitted as necessary. The drawing demonstrates the crimp removal procedure (max. 5x).

