

<p>1 - 2.5 mm<sup>2</sup> "s" ① 1.5 - 2.5 mm<sup>2</sup> "st" 400 V/4 kV/2 ② I<sub>N</sub> 24 A 12 mm / 0.47 in ③</p>	<p>AWG 18 - 12 "s" AWG 16 - 12 "st" 600 V, 20 A<sup>Ⓜ</sup> 600 V, 20 A<sup>Ⓢ</sup></p>	<p>0.75 - 2.5 mm<sup>2</sup> "s" 1.5 - 2.5 mm<sup>2</sup> "st" 400 V/4 kV/2 ② I<sub>N</sub> 24 A 12 mm / 0.47 in ③</p>	<p>AWG 18 - 12 "s" AWG 16 - 12 "st" 600 V, 20 A<sup>Ⓜ</sup> 600 V, 20 A<sup>Ⓢ</sup></p>	<p>2.5 - 6 mm<sup>2</sup> "s+st" 400 V/4 kV/2 ② I<sub>N</sub> 41 A 12 - 13 mm / 0.49 in ③</p>	<p>AWG 14 - 10 "s+st" 600 V, 20 A<sup>Ⓜ</sup> 600 V, 30 A<sup>Ⓢ</sup></p>
---	---	--	---	---	---




Item No.	Pack. Unit	Color	Item No.	Pack. Unit	Item No.	Pack. Unit
PUSH WIRE® connector for junction boxes, 8-conductor connector, transparent housing, dark gray cover			PUSH WIRE® connector for junction boxes, 4-conductor connector, continuous service temperature 150°C		PUSH WIRE® connector for junction boxes, 3-conductor connector, transparent housing, red cover	
773-108	500 (10x50)	● black	773-514	1000 (10x100)	773-173	500 (10x50)

773 Series Accessories


Syringe,




contents: 20 ml "Alu-Plus" contact paste  
249-130 20 (4x5)

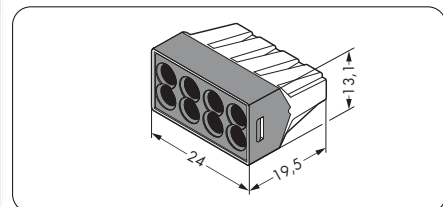

Dimensions in mm

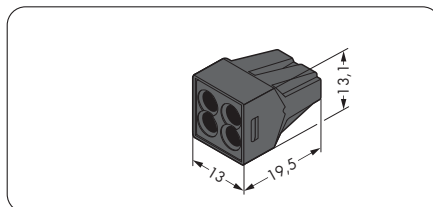


Dimensions in mm

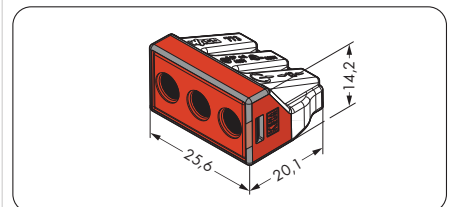

Dimensions in mm

# Mounting Carrier for PUSH WIRE® Connectors for DIN 35 Rail or Screw Mount 773 Series

Mounting carrier



Snapping onto the carrier rail.

- ❶ When using conductors with the same diameter, 0.75 mm<sup>2</sup>/AWG 18 cross section is also possible.
- ❷ in grounded power lines  
400 V = rated voltage  
4 kV = rated surge voltage  
2 = pollution degree  
(also see Section 14)
- ❸ Strip length, see packaging or instructions.

Color	Item No.	Pack. Unit
<b>Mounting carrier</b> for all PUSH WIRE® connectors 773 Series		
orange	773-332	50 (5x10)

### Item-Specific Accessories

Self-adhesive marking strips, plain,		
Height of marking strip: 5 mm, 48 self-adhesive strips per card		
white	210-334	1



Terminating solid and stranded 6 mm<sup>2</sup>/AWG 10 conductors.

A mounting carrier (see accessories) suits applications where the connectors must be marked and fixed in position. The carrier fits up to two connectors on DIN 35 carrier rails or screw mounting on level surfaces.

Using this PUSH WIRE® connector, a large range of wiring applications can be achieved in distribution or junction boxes, for example. To mention just a few: potential multiplication of an 6 mm<sup>2</sup>/AWG 10 conductor in a junction box, changing from or to 6 mm<sup>2</sup>/AWG 10 conductor size.