

5

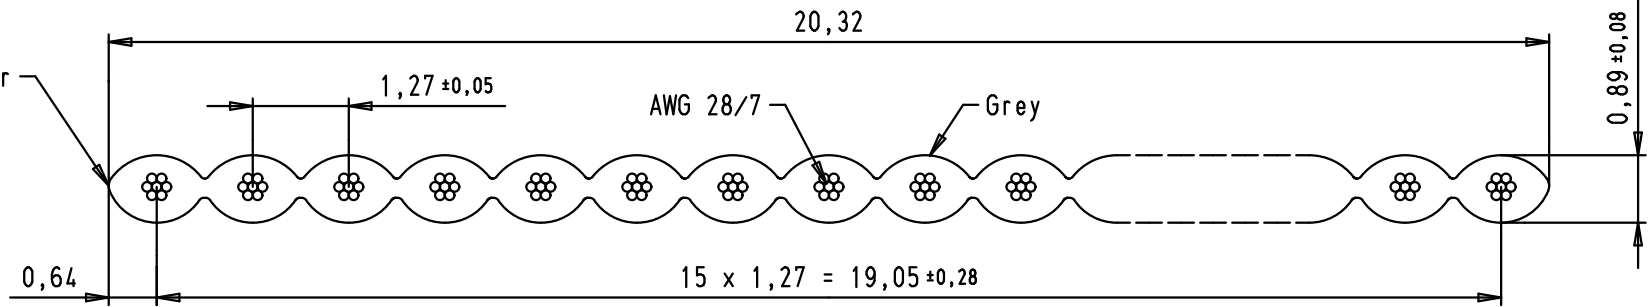
4

3



2

1

Edge mark on first conductor



- Wire ————— Tinned copper
- Gauge ————— AWG 28/7 0,089 mm<sup>2</sup>
- Voltage rating ————— 300 Vr.m.s
- Current rating ————— 1,3 A at 10°C rise above ambient
- Capacity unbalanced ————— 45,9 pF/m at 1 MHz
- Impedance unbalanced ————— 105 Ω
- Propagation delay ————— 4,9 ns/m nominal
- Insulation material ————— PVC
- Temperature rating ————— -20°C (operating)  
-30°C (static) to +105°C
- Flammability rating ————— Flame retardant VW1
- Insulation resistance ————— 10 000 MΩ/km
- Approval ————— UL AWM style 2651

				Dot.	Name	 All Dim. in mm Orig. Size DIN A 4	SEK 18 flat cable 16 poles	Moßstab/ Scale
			Detail.	20/10/05	JMDR			10:1
			Insp.					
			Stand.					
09 18 016 7004	100 m (328 feet)	34400	17/09/07	PK	HARTING EURL F-95972 Paris		TB 09 18 016 700X	Blatt/ Page
09 18 016 7001	30,48 m (100 feet)	33246	20/10/05	JMDR				1/1
Part number	Length per reel	Mod.	Dot.	Name				Sub.