




TFE2, TFE4

Features and Benefits

TFE heat shrink tubing is specified predominantly because of its very high temperature resistance. It is an extra thin walled transparent tubing that has both high abrasion resistance and good resistance against aggressive chemicals. TFE is available in either 2:1 (TFE2) or 4:1 (TFE4) shrink ratios.

Application

TFE is ideal for high temperature applications, where resistance to aggressive fluids is required or a very thin walled tubing is needed, for example in pH-measuring instruments. TFE tubing is also used to reduce movement due to friction, covering cylinders for example.

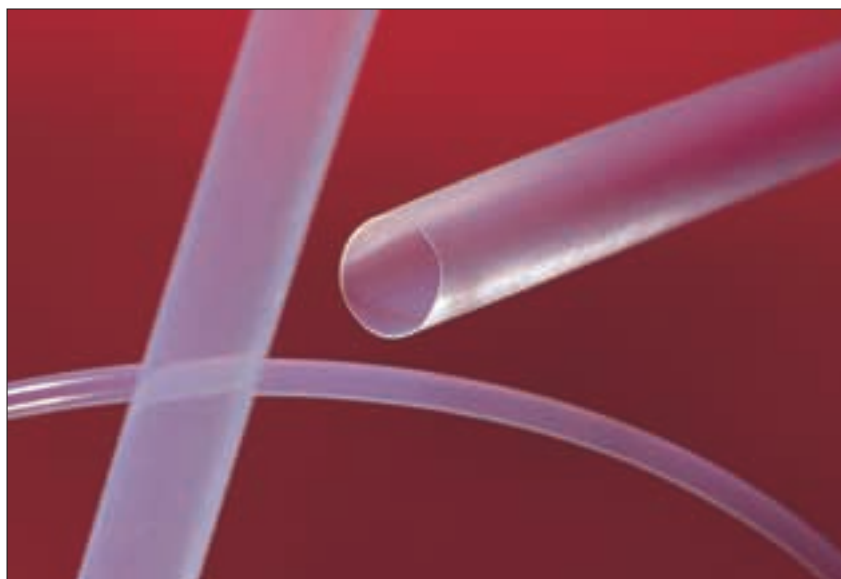

TFE is available in either 2:1 or 4:1 shrink ratios.

Technical Table


Article-No.	Type	Wire Size (AWG)	Supplied Ø D	Recov. Ø d	Wall (WT) nom.	Length (L) (m)
TFE2						
336-00079	TFE2-30	30	0.86	0.38	0.23	1.22
336-00099	TFE2-28	28	0.96	0.46	0.23	1.22
336-00109	TFE2-26	26	1.17	0.56	0.23	1.22
336-00139	TFE2-24	24	1.27	0.69	0.25	1.22
336-00149	TFE2-22	22	1.39	0.82	0.25	1.22
336-00159	TFE2-20	20	1.52	0.99	0.30	1.22
336-00199	TFE2-18	18	1.93	1.25	0.30	1.22
336-00249	TFE2-16	16	2.36	1.55	0.30	1.22
336-00319	TFE2-14	14	3.05	1.83	0.30	1.22
336-00399	TFE2-12	12	3.81	2.26	0.30	1.22
336-00489	TFE2-10	10	4.85	2.85	0.30	1.22
336-00619	TFE2-8	8	6.10	3.58	0.38	1.22
336-00779	TFE2-6	6	7.67	4.52	0.38	1.22
336-00949	TFE2-4	4	9.40	5.69	0.38	1.22
336-01109	TFE2-2	2	10.92	7.06	0.38	1.22
336-01209	TFE2-0	0	11.94	8.81	0.38	1.22
TFE4						
		Size/Inch				
339-00209	TFE4-5/64	5/64	1.98	0.64	0.22	1.22
339-00329	TFE4-1/8	1/8	3.17	0.94	0.25	1.22
339-00340	TFE4-3/16	3/16	4.75	1.27	0.30	1.22
339-00649	TFE4-1/4	1/4	6.35	1.60	0.30	1.22
339-00959	TFE4-3/8	3/8	9.52	2.44	0.30	1.22
339-01279	TFE4-1/2	1/2	12.7	3.66	0.38	1.22
339-01599	TFE4-5/8	5/8	15.87	4.52	0.38	1.22
339-01909	TFE4-3/4	3/4	19.05	5.69	0.38	1.22
339-02549	TFE4-1	1	25.4	7.06	0.38	1.22
339-03189	TFE4-1 1/4	1 1/4	31.75	8.82	0.38	1.22

All dimensions in mm. Subject to technical changes.

AWG American Wire Gauge

Material Data

Material	Polytetrafluoroethylene (PTFE)
Colour	Transparent (CL)
Shrink Ratio	2:1, 4:1
Operating Temperature	-65 °C to +260 °C
Minimum Shrink Temperature	+330 °C
Flammability	Non burning
Longitudinal change after shrinkage	-20% max.
Dielectric Strength	40 kV/mm according to DIN 53481
Specification	SAE - AMS - DTL-23053 / 12, MIL-DTL-23053 / 12



TFE2, TFE4



Please note! Not every product listed carries these approvals! For Product Specific Approvals please refer to the Appendix.