







Through and Ground Conductor Terminal Blocks 1 (1.5) mm² TOPJOB® SJ – 2000 Series






0.14 - 1 (1.5) mm² ① 800 V/6 kV/3 ② I_N 13.5 A (18 A) AWG 24 - 16 600 V, 10 A ③ 600 V, 10 A ④ Terminal block width 3.5 mm / 0.138 in  9 - 11 mm / 0.39 in ⑤	0.14 - 1 (1.5) mm² ① 800 V/6 kV/3 ② I_N 13.5 A (18 A) AWG 24 - 16 600 V, 10 A ③ 600 V, 10 A ④ Terminal block width 3.5 mm / 0.138 in  9 - 11 mm / 0.39 in ⑤	0.14 - 1 (1.5) mm² ① 800 V/6 kV/3 ② I_N 13.5 A (18 A) AWG 24 - 16 600 V, 10 A ③ 600 V, 10 A ④ Terminal block width 3.5 mm / 0.138 in  9 - 11 mm / 0.39 in ⑤
--	--	--



Item No.	Pack. Unit	Item No.	Pack. Unit	Item No.	Pack. Unit
2-conductor through terminal block		3-conductor through terminal block		4-conductor through terminal block	
gray 2000-1201	100	gray 2000-1301	100	gray 2000-1401	100
blue 2000-1204	100	blue 2000-1304	100	blue 2000-1404	100
orange 2000-1202	100	orange 2000-1302	100	orange 2000-1402	100
red 2000-1203	100	red 2000-1303	100	red 2000-1403	100
black 2000-1205	100	black 2000-1305	100	black 2000-1405	100
yellow 2000-1206	100	yellow 2000-1306	100	yellow 2000-1406	100
2-conductor ground terminal block		3-conductor ground terminal block		4-conductor ground terminal block	
green-yellow 2000-1207	100	green-yellow 2000-1307	100	green-yellow 2000-1407	100
Item-Specific Accessories		Item-Specific Accessories		Item-Specific Accessories	
End and intermediate plate, 0.7 mm thick		End and intermediate plate, 0.7 mm thick		End and intermediate plate, 0.7 mm thick	
orange 2000-1292	100 (4x25)	orange 2000-1392	100 (4x25)	orange 2000-1492	100 (4x25)
gray 2000-1291	100 (4x25)	gray 2000-1391	100 (4x25)	gray 2000-1491	100 (4x25)


2000 Series Accessories

Appropriate marking systems: WMB/Marking strips
(see Section 13)

Push-in type jumper bar, insulated,  I_N 14 A, light gray 2-way 2000-402 200 (8x25) 3-way 2000-403 200 (8x25) 4-way 2000-404 200 (8x25) 5-way 2000-405 100 (4x25) 6-way 2000-406 100 (4x25) 7-way 2000-407 100 (4x25) 8-way 2000-408 100 (4x25) 9-way 2000-409 100 (4x25) 10-way 2000-410 100 (4x25)	Marking strip, plain,  11 mm wide, 50 m roll white 2009-110 1	
	WMB Multi marking system,  10 strips with 10 markers per card, for 3.5 mm terminal block width plain 793-3501 5	
Push-in type jumper bar, insulated,  I_N 14 A, light gray 1 - 3 2000-433 200 (8x25) 1 - 4 2000-434 200 (8x25) 1 - 5 2000-435 100 (4x25) 1 - 6 2000-436 100 (4x25) 1 - 7 2000-437 100 (4x25) 1 - 8 2000-438 100 (4x25) 1 - 9 2000-439 100 (4x25) 1 - 10 2000-440 100 (4x25)		
Protective warning marker,  with high-voltage symbol, black, for 5 terminal blocks yellow 2000-115 100 (4x25)		

Marking via Marker Strips and WMB Multi Markers

- 1 Conductor sizes: 0.14 mm² - 1.5 mm² "s + f-st";
Push-in conductor sizes: 0.5 mm² - 1.5 mm² "s"
and 0.5 mm² - 0.75 mm²
"insulated ferrule, 10 mm"
- 2 800 V = rated voltage
6 kV = rated surge voltage
3 = pollution degree
(also see Section 14)
- 3 Strip length, see packaging or instructions.
- 4 Suitable for Ex i applications

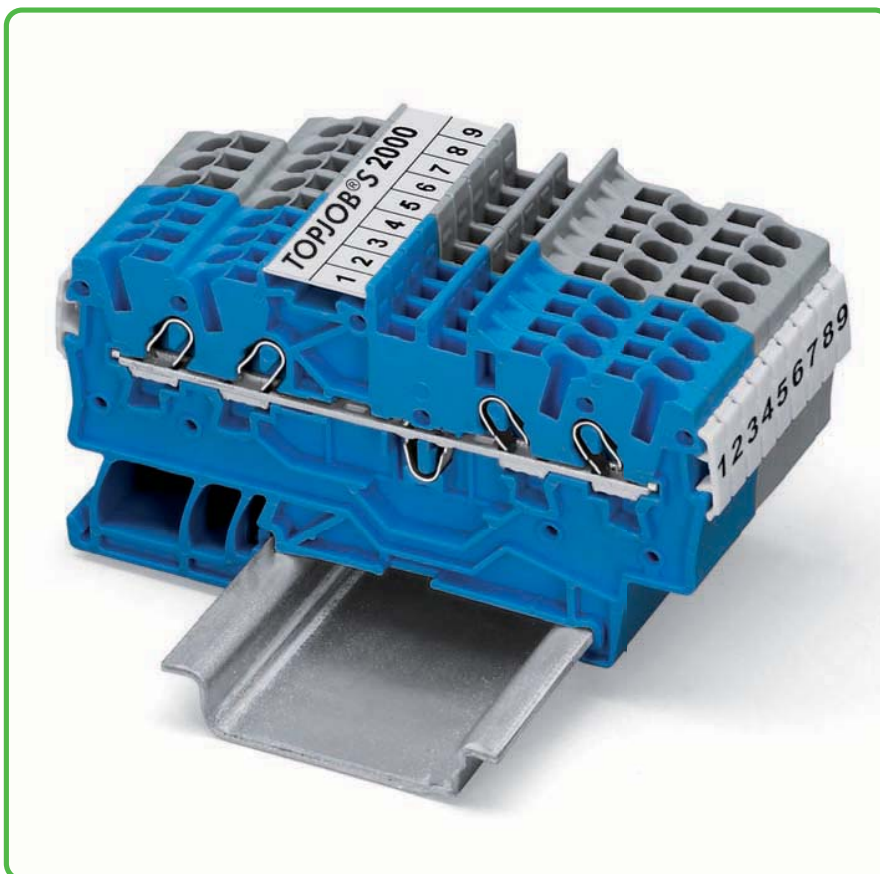

Standard and quick marking options:

Three marker slots are available for both individual markers and marking strips.