
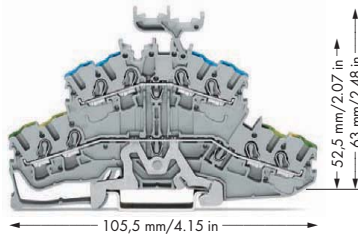
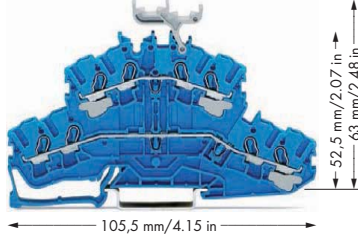


4-Conductor, Double-Deck Terminal Blocks 2.5 (4) mm² TOPJOB® SJ – 2002 Series




0.25 - 2.5 (4) mm² ① | AWG 22 - 12
800 V/8 kV/3 ②
I_N 24 A (28 A)
Terminal block width 5.2 mm / 0.205 in
10 - 12 mm / 0.43 in ③

0.25 - 2.5 (4) mm² ① | AWG 22 - 12
800 V/8 kV/3 ②
I_N 24 A (28 A)
Terminal block width 5.2 mm / 0.205 in
10 - 12 mm / 0.43 in ③

0.25 - 2.5 (4) mm² ① | AWG 22 - 12
800 V/8 kV/3 ②
I_N 24 A (28 A)
Terminal block width 5.2 mm / 0.205 in
10 - 12 mm / 0.43 in ③

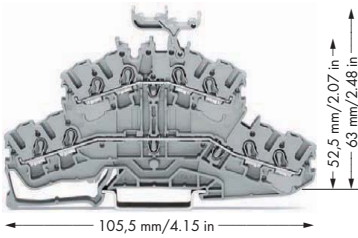


Item No.	Pack. Unit	Item No.	Pack. Unit	Item No.	Pack. Unit
Through/through terminal block, with marker carrier, housing color: gray		Through/through terminal block, with marker carrier, housing color: blue		Ground conductor/through terminal block, with marker carrier, housing color: gray	
L/L 2002-2431	50	N/N 2002-2434	50	PE/N 2002-2447	50
N/L 2002-2432	50			PE/L 2002-2457	50
L/N 2002-2433	50				
Through/through terminal block, without marker carrier, housing color: gray		Through/through terminal block, without marker carrier, housing color: blue		Ground conductor/through terminal block, without marker carrier, housing color: gray	
L/L 2002-2401	50	N/N 2002-2404	50	PE/N 2002-2417	50
N/L 2002-2402	50			PE/L 2002-2427	50
L/N 2002-2403	50				
ⓘ Approvals are pending					

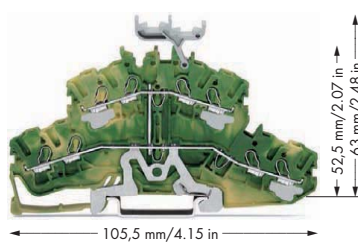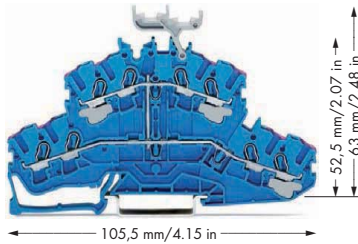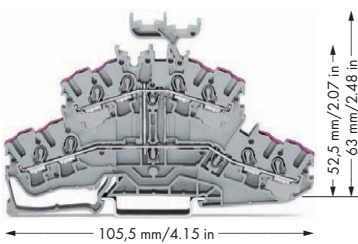







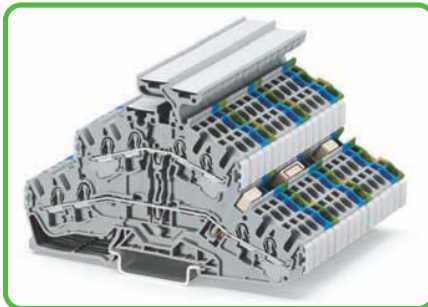










Item No.	Pack. Unit	Item No.	Pack. Unit	Item No.	Pack. Unit
8-conductor through terminal block, with marker carrier, internal commoning, conductor entry position colored in violet, housing color: gray		8-conductor through terminal block, with marker carrier, internal commoning, conductor entry position colored in violet, housing color: blue		8-conductor ground terminal block, with marker carrier, internal commoning, housing color: green-yellow	
L 2002-2438	50	N 2002-2439	50	PE 2002-2437	50
8-conductor through terminal block, without marker carrier, internal commoning, conductor entry position colored in violet, housing color: gray		8-conductor through terminal block, without marker carrier, internal commoning, conductor entry position colored in violet, housing color: blue		8-conductor ground terminal block, without marker carrier, internal commoning, housing color: green-yellow	
L 2002-2408	50	N 2002-2409	50	PE 2002-2407	50

For list of approvals and user guide, see pages 540 and 542.

- ① Conductor sizes: 0.25 mm² - 4 mm² "s + f-st";
Push-in conductor sizes: 0.75 mm² - 4 mm² "s"
and 0.75 mm² - 2.5 mm²
"insulated ferrule, 12 mm"
- ② 500 V = rated voltage
6 kV = rated surge voltage
3 = pollution degree
(also see Section 14)
- ③ Strip length, see packaging or instructions.
- ④ Suitable for Ex i applications



Double-deck terminal block assembly

2002 Series Accessories		Appropriate marking systems: WMB/Marking strips/WMB Inline (see Section 13)	
End and intermediate plate, 0.8 mm thick  orange 2002-2492 100 (4x25) gray 2002-2491 100 (4x25)		Banana plug,  for socket 4 mm Ø, color mixed 215-111 50	
Double-deck marker carrier,  pivoting gray 2002-121 50 (2x25)		Testing tap,  for max. 2.5 mm ² gray 2009-182 100 (4x25)	
Insulation stop,  5 pcs/strip, 0.25 - 0.5 mm ² light gray 2002-171 200 (8x25)		Test plug,  with 500 mm/17.7 in cable, 2 mm Ø red 210-136 50	
Insulation stop,  5 pcs/strip, 0.75 - 1 mm ² dark gray 2002-172 200 (8x25)		Test plug,  with 500 mm/17.7 in cable, 2.3 mm Ø yellow 210-137 50	
Push-in type jumper bar, insulated,  I _N 25 A, light gray 2-way 2002-402 200 (8x25) 3-way 2002-403 200 (8x25) 4-way 2002-404 200 (8x25) 5-way 2002-405 100 (4x25) 6-way 2002-406 100 (4x25) 7-way 2002-407 100 (4x25) 8-way 2002-408 100 (4x25) 9-way 2002-409 100 (4x25) 10-way 2002-410 100 (4x25)		WMB Multi marking system,  10 strips with 10 markers per card, stretchable 5 - 5.2 mm plain 793-5501 5	
Push-in type jumper bar, insulated,  I _N 25 A, light gray 1 - 3 2002-433 200 (8x25) 1 - 4 2002-434 200 (8x25) 1 - 5 2002-435 100 (4x25) 1 - 6 2002-436 100 (4x25) 1 - 7 2002-437 100 (4x25) 1 - 8 2002-438 100 (4x25) 1 - 9 2002-439 100 (4x25) 1 - 10 2002-440 100 (4x25)		WMB Multi marking system, plain,  10 strips with 10 markers per card, stretchable 5 - 5.2 mm yellow 793-5501/000-002 red 793-5501/000-005 blue 793-5501/000-006 gray 793-5501/000-007 orange 793-5501/000-012 light green 793-5501/000-017 green 793-5501/000-023 violet 793-5501/000-024 5	
		WMB Inline, plain,  stretchable 5 - 5.2 mm, 1,500 WMB markers, 5 mm, on roll white 2009-115 1	
		Marking strip, plain,  11 mm wide, 50 m roll white 2009-110 1	
Protective warning marker,  with high-voltage symbol, black, for 5 terminal blocks yellow 2002-115 100 (4x25)		TOPJOB®S group marker carrier,  snap-on type for jumper slot, 5 mm wide gray 2009-191 50 (2x25)	
Test plug adapter,  for test plug 4 mm Ø gray 2009-174 100 (4x25)			