


Polyester self-closing sleeving, flame-retardant

- Helagaine Twist-In-FR

Helagaine Twist-In-FR can be used in areas where fire protection is important, such as railway, aerospace and shipbuilding.

Features and Benefits

- Self-closing sleeve made from polyester
- Optimal fire protection
- Ideal for retro-fitting
- Very easy, quick installation and removal
- Quick and easy access to bundle for inspection, maintenance and assembly
- Small range of sizes covers a wide range of applications

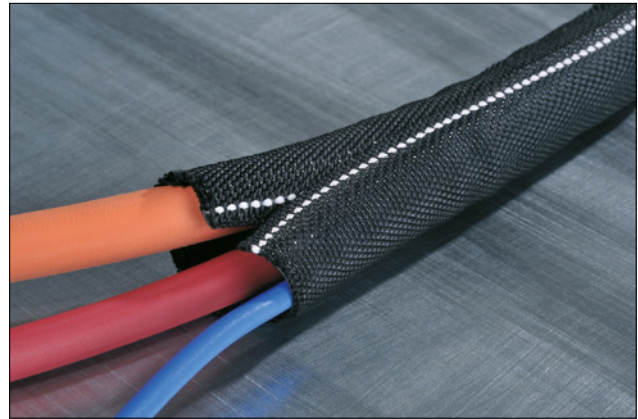

Helagaine Twist-In-FR with the white identification yarn.

To prevent fraying, the sleeve can be cut with the hot cutting tool HSG0, see page 382.



One Step to the Web!



MATERIAL	Polyester (PET)
Operating Temperature	-50 °C to +125 °C
Melting Point	+240 °C
Flammability	FMVSS 302, Self extinguishing
Specifications	CEN TS 45545-2: 2009, NF F 16-101

TYPE	Bundle Ø min.	Bundle Ø max.	Colour	Reel Length	Article-No.
Twist-In-FR 05	4	5	Black with White Identification Yarn (BKIDWH)	150 m	170-01100
Twist-In-FR 08	5	8	Black with White Identification Yarn (BKIDWH)	100 m	170-01101
Twist-In-FR 13	10	13	Black with White Identification Yarn (BKIDWH)	50 m	170-01102
Twist-In-FR 19	16	19	Black with White Identification Yarn (BKIDWH)	25 m	170-01104
Twist-In-FR 25	19	25	Black with White Identification Yarn (BKIDWH)	25 m	170-01105
Twist-In-FR 29	25	29	Black with White Identification Yarn (BKIDWH)	15 m	170-01106
Twist-In-FR 32	29	32	Black with White Identification Yarn (BKIDWH)	15 m	170-01107
Twist-In-FR 38	32	38	Black with White Identification Yarn (BKIDWH)	15 m	170-01108
Twist-In-FR 50	38	50	Black with White Identification Yarn (BKIDWH)	15 m	170-01109

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content.



Please note! Not all products listed on this page may have this approval.
For product specific approvals please refer to the Appendix.