





Strip conductor to 9 - 10 mm / 0.37 in.





Conductor termination: Open clamping unit using the lever and insert conductor.

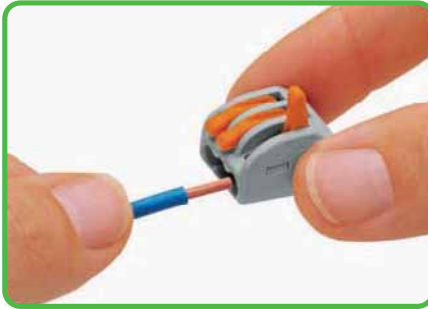

Then lower lever to close the clamp.

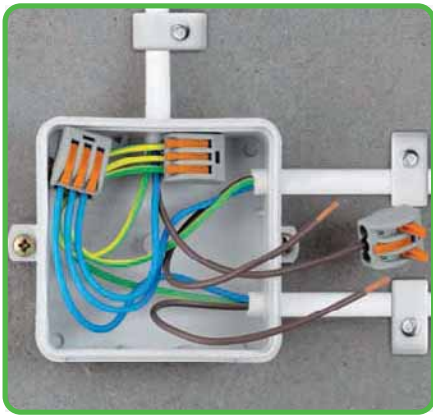

Wiring fine-stranded conductors in a junction box.

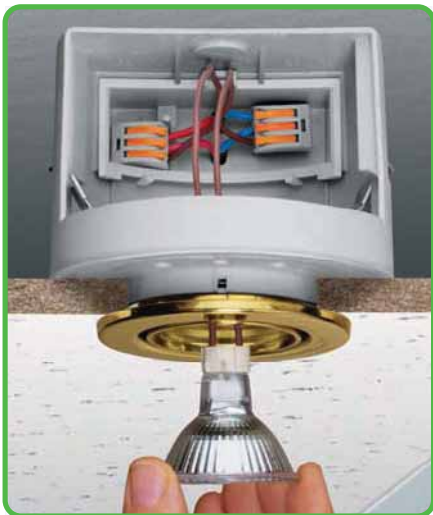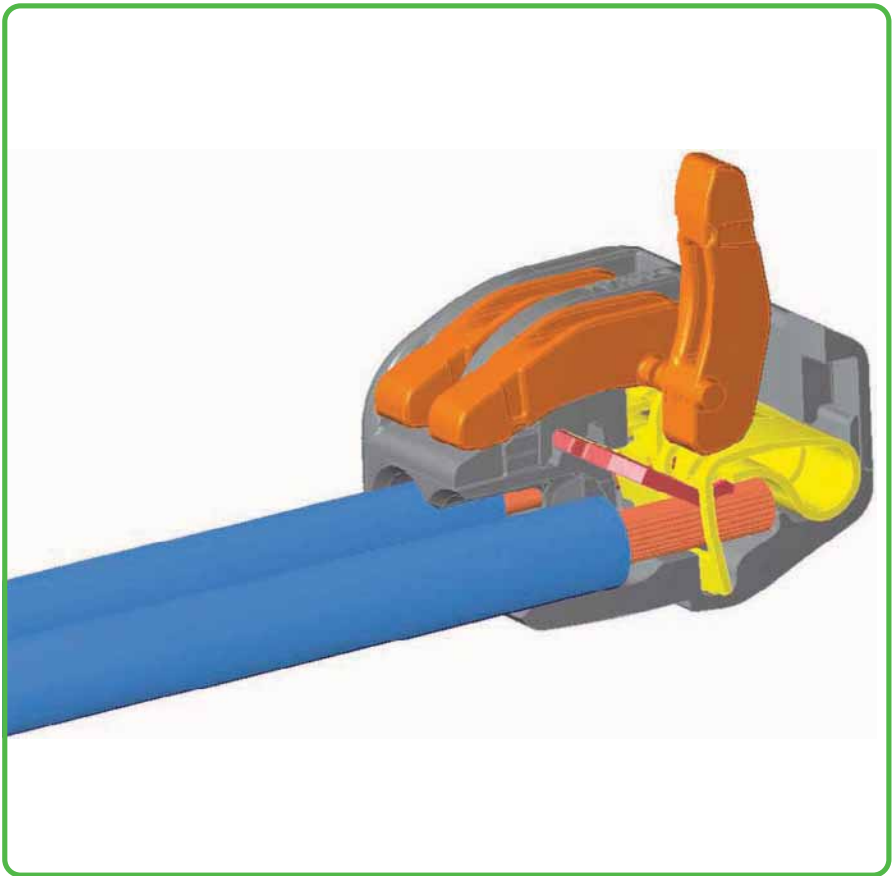

Individual design of low-voltage lighting systems.



Connecting pre-wired and pre-fabricated components; e.g., modular assemblies used in mobile homes.



Lighting fixture connected with flexible power feed.

CAGE CLAMP® clamps the following copper conductors:*

solid

stranded

fine-stranded, also with tinned single strands

fine-stranded, tip-bonded

fine-stranded, with ferrule ❶ (gastight crimped)

fine-stranded, with pin terminal (gastight crimped)

* For aluminum conductors, see notes in Section 14.

❶ When using ferrules, the max. conductor cross section accommodated is one size smaller than max. rating of terminal block.