
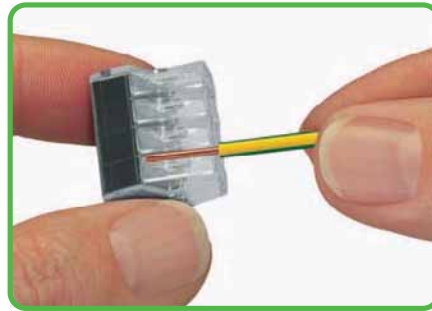


PUSH WIRE® Connectors for Junction Boxes, 773 Series - Description and Handling -

Stripped length

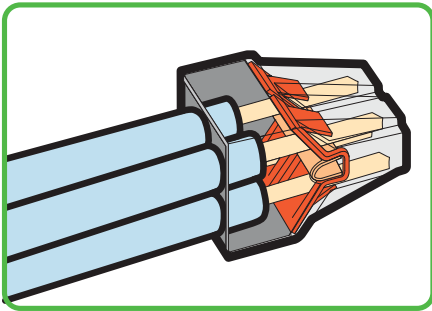


Strip solid conductor to 10 - 13 mm / 0.45 in.

PUSH WIRE® connection



Termination: Insert stripped, solid conductor fully.

PUSH WIRE® connection

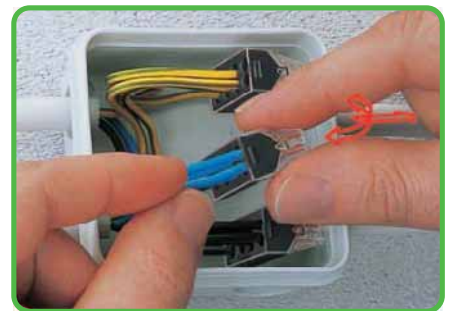

Removal: Hold conductor to be removed and twist alternately left and right while pulling the connector.

Testing



PUSH WIRE® clamps the following copper conductors:*

solid



stranded

* Use contact paste "Alu-Plus" when connecting aluminum conductors
Item No. 249-130