

Subracks - EuropacPRO

SCHROFF

OVERVIEW

N / A	INI	1/ /	T 1	$I \cap$	
IVI <i>P</i>	ИII	KA	IΑ	LU	U

Capillets	٠	٠	٠	٠	٠	٠	٠	. !

Wall mounted cases 2

Accessories for cabinets and wall mounted cases . . 3

Climate control . . 4

Electronics cases 5

Subracks/ 19" chassis 6

Front panels, plug-in units 7


Systems 8

Power supply units 9

Backplanes 10

Connectors, front panel component system 11

Appendix 12

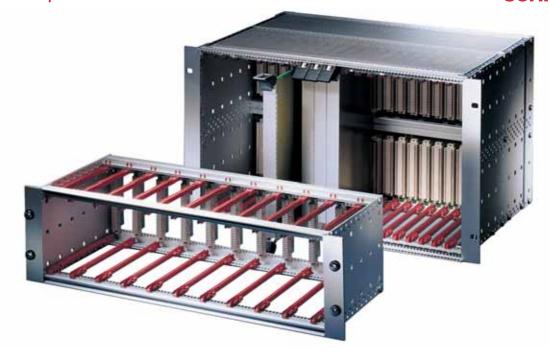





Different horizontal rails for various applications



The IEEE handles and shielded front panels are designed for the construction of CompactPCI and VME64x subrack systems




Sequential numbering on horizontal rails (> 28 HP) and markings on the guide rails provide quick optical positioning aids. ESD clips can be used at front or rear, to protect electronics from electrostatic discharge

STANDARDS/CERTIFICATIONS

- Inner and outer dimensions meet: IEC 60297-3-100, -101, -102, -103, -104, -105
 IEEE 1101.1 and IEEE 1101.10/11
- Type of protection IP 20 to IEC 60529
- EMC testing to IEC 61587-3
- Shock and vibration test reports:
 German "Bahn" standards BN 411002, BN 411003;
 NF F 60002, NF F 67012
 IEC 61587-2, EN 50155
- Nuclear plants KTA 1401

EMC CURVE

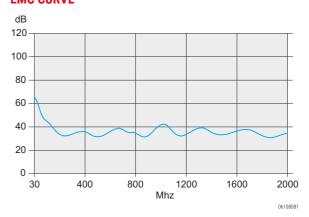

.6 | nVent.com/SCHROFF



Subracks - EuropacPRO

OVERVIEW

Overview 6.6

Introduction. . . . 6.4


19" SUBRACKS

- Kits or individual configuration
- · One product and accessories platform for every kind of customer requirement and application
- Suitable for CompactPCI and VME64x insertion and extractor handles
- EMC shielding can easily be retrofitted if needed
- Shock and vibration resistant up to 5 q
- 3D PDF or CAD 3D data available for download



KITS

- · All required parts available under one order number, some pre-fitted
- · Most popular dimensions and versions available from stock
- For installed loads up to 7.5 kg, up to 11 kg and up to 15 kg
- · As unshielded or shielded version
- · Supplied as space-saving flat-pack



SERVICEPLUS INDIVIDUAL CONFIGURATION

- Single parts may individually be configured, respectively assembled on request (from quantity 1)
- · Very wide range of variants in heigth, width and depth
- Guide rails for different applications
- · EMC shielding material to improve EMC performance
- Interior assembly options with mounting plate or combined mounting (3 + 6 U segments)
- Other accessories and assembly kits

SERVICEPLUS

e.g. individual configuration and assembly

e.g. modification (cut-outs)

e.g. downloads (CAD drawings, user manuals, test reports)

e.g. custom solutions

Kits	
Light	6.8
Flexible	6.9
Heavy	6.14
CompactPCI	6.16

SELVICEI EUS	
configuration	
Side panels	6.21
Horizontal rails,	
threaded inserts,	
perforated strips .	6.29
Guide rails	6.37
Cover plates	6.44
EMC shielding	6.54
Interior assemblies.	6.59
Assembly kits	6.65
Application	

examples 6.71

Carvina DI IIC

ubracks for nobile railway pplications	6.70

europacPRO for
industrial
applications

europaceko	Ш	U	Г	
rugged				
applications				6.9


6.86




Subracks - EuropacPRO

KIT, "FLEXIBLE", SHIELDED, FOR BACKPLANE MOUNTING



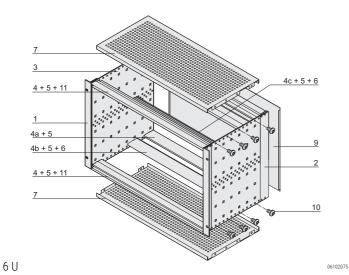



D = overall depth, D1 = insertion depth, D2 = board depth = D1 - 15 mm



Rear horizontal rail for backplane mounting with insulation strip

- Subrack with side panel type F ("flexible"), 19" bracket is depth-adjustable
- Rear horizontal rail for backplane mounting with insulation
- Shielding typically 40 dB at 1 GHz, 30 dB at 2 GHz, assuming that the front is closed with shielded front panels
- Installed load up to 11 kg

DELIVERY COMPRISES ((kit))

Item	Qty		Description
	3 U	6 U	
1	2	2	19" support bracket for EMC textile gasket
2	2	2	Rear corner profile for EMC textile gasket
3	2	2	Side panel type F
4	2	2	Front horizontal rail (L-KD)
4 a	2	2	Rear horizontal rail (L-KD)
4 b	2	2	Rear horizontal rail (L-ST) for backplane mounting with insulation strip
4 c	-	1	Centre horizontal rail (ST)
5	6	8	Threaded insert (pre-fitted)
6	2	4	Insulation strip, fixed
7	2	2	EMC cover plate
8	1	1	EMC gasketing material (pre-fitted)
9	1	1	Rear panel
10	1	1	Fixing material kit
11	2	2	Perforated strip (pre-fitted)
12	1	1	User manual

ORDER INFORMATION

Height U	Width HP	Depth D mm	Depth D1 mm	Part no.
3	84	235	175/235	24563-142
3	84	295	175/235/295	24563-143
3	84	355	175/235/295	24563-144
3	84	415	175/235/295	24563-145
3	84	475	175/235/295	24563-146
6	84	235	175/235	24563-442
6	84	295	175/235/295	24563-443
6	84	355	175/235/295	24563-444
6	84	415	175/235/295	24563-445
6	84	475	175/235/295	24563-446

Accessories

19" assembly kit (screw, washer, nut) $(8 \times \text{screws}, 8 \times \text{plastic washers}, 8 \times \text{cage})$	21100-435	
Guide rails (standard), ESD clips		
Depth D2	Qty/PU	Part no.
mm	piece	
160	10	24560-351
220	10	24560-353
280	10	24560-379
340	10	24560-380
ESD clip for guide rails PU 50 pieces		24560-255