

HelaGuard SCSB Galvanised Steel Conduit, Galvanised Steel Overbraid


Flexible, galvanised steel conduit with galvanised steel overbraid.

Features and Benefits

- High compression strength
- High tensile strength
- High impact strength
- Highly flexible
- Highly resistant to abrasion
- Provides EMC screening
- Highly resistant to hot metal swarf and splashes

Application

Industrial environments and high temperatures.

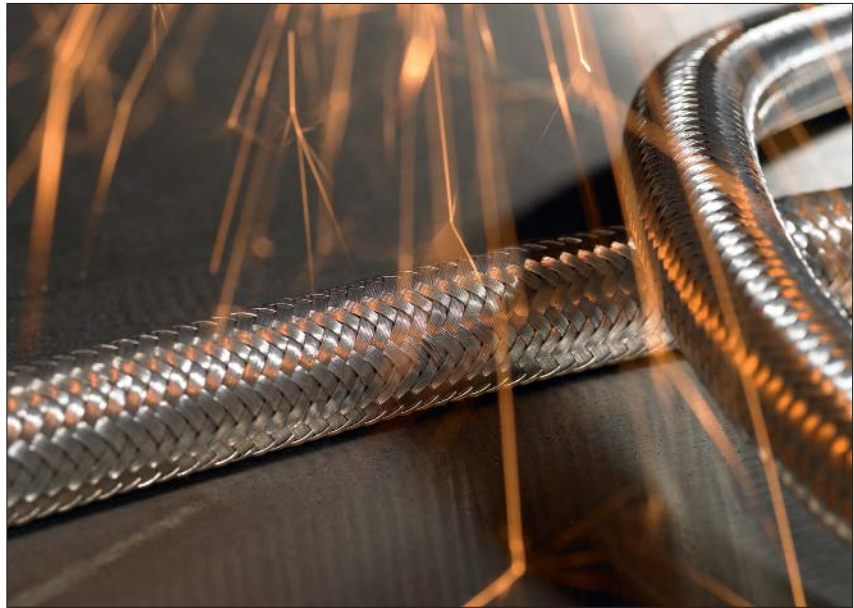

HelaGuard SCSB galvanised steel conduit with galvanised steel overbraid is highly resistant to hot metal swarf and splashes.

Material Data

| | |
|-----------------------|------------------------------|
| Material | Galvanised Steel (GS) |
| Operating Temperature | -100 °C to +300 °C |



Technical Table

| Article-No. | Type | Nominal Ø | Outside Ø (OD) | Ø D | Bending Radius | Weight (g/m) | Reel Length (m) | Colour |
|-------------|---------------|-----------|----------------|------|----------------|--------------|-----------------|------------|
| 166-34400 | SCSB12 | 12 | 14.0 | 10.2 | 30 | 232 | 25 | Metal (ML) |
| 166-34401 | SCSB16 | 16 | 17.5 | 13.0 | 40 | 298 | 25 | Metal (ML) |
| 166-34402 | SCSB20 | 20 | 21.5 | 16.9 | 45 | 446 | 25 | Metal (ML) |
| 166-34403 | SCSB25 | 25 | 26.0 | 21.1 | 55 | 503 | 25 | Metal (ML) |
| 166-34404 | SCSB32 | 32 | 34.0 | 28.1 | 70 | 702 | 25 | Metal (ML) |
| 166-34405 | SCSB40 | 40 | 43.5 | 37.6 | 80 | 1086 | 10 | Metal (ML) |

All dimensions in mm. Subject to technical changes.

Other reel length available on request.