

ELECTRONIC SECTION

Number of contacts	21, 24
Contact spacing (mm)	
Male connector	2.54 x 5.08
Female connector	5.08
Working current	6 A max. see current carrying capacity chart
Clearance	≥ 1.6 mm
Creepage	≥ 3 mm
Working voltage	
The working voltage also depends on the clearance and creepage dimensions on the pcb itself, and the associated wiring	
according to the safety regulations of the equipment. Explanations see chapter 00	
Test voltage $U_{r.m.s.}$	1.55 kV
Contact resistance	≤ 15 mΩ wrap, solder termination ≤ 20 mΩ including crimp connection

Electrical termination	
Male connector	Solder pins for pcb connection Ø 1 ± 0.1 mm acc. to IEC 60 326-3 Wrap posts 1 x 1 mm diagonal 1.34-1.45 mm
Female connector	Solder pins for pcb connection Ø 1 ± 0.1 mm acc. to IEC 60 326-3 Crimp terminal 0.09-1.5 mm ²

Contact surface	
Contact zone	Selectively plated according to performance level ¹⁾

HEAVY DUTY SECTION*

Number of contacts	7
Working current	15 A max. see current carrying capacity chart
Clearance	≥ 4.5 mm
Creepage	≥ 8.0 mm
Working voltage	
The working voltage also depends on the clearance and creepage dimensions on the pcb itself, and the associated wiring	
according to the safety regulations of the equipment. Explanations see chapter 00	
Test voltage $U_{r.m.s.}$	3.1 kV
Contact resistance	≤ 8 mΩ

Electrical termination	
Male and female connector	Connector for faston 6.3 x 2.5 (faston width x wire gauge) acc. to DIN 46 245 and DIN 46 247
Male connector	Solder pins for pcb connection Ø 1.6 ± 0.1 mm acc. to DIN EN 60 097

Contact surface	
Contact zone	Hard silver plated

BOTH PARTS

Insulation resistance	≥ 10 ¹² Ω
Temperature range	- 55 °C ... + 125 °C
The higher temperature limit includes the local ambient and heating effects of the contacts under load	

Insertion and withdrawal force ≤ 85 N

Materials	
Mouldings	Thermoplastic resin, glass-fibre filled, UL 94-V0
Contacts	Copper alloy

* only for type MH 24 + 7
¹⁾ Explanation of performance levels see chapter 00


Mating conditions	see chapter 00
Coding systems	see page 03.26

Current carrying capacity


The current carrying capacity is limited by maximum temperature of materials for inserts and contacts including terminals. The current capacity curve is valid for continuous, non interrupted current loaded contacts of connectors when simultaneous power on all contacts is given, without exceeding the maximum temperature.

Control and test procedures according to DIN IEC 60 512

Electronic section

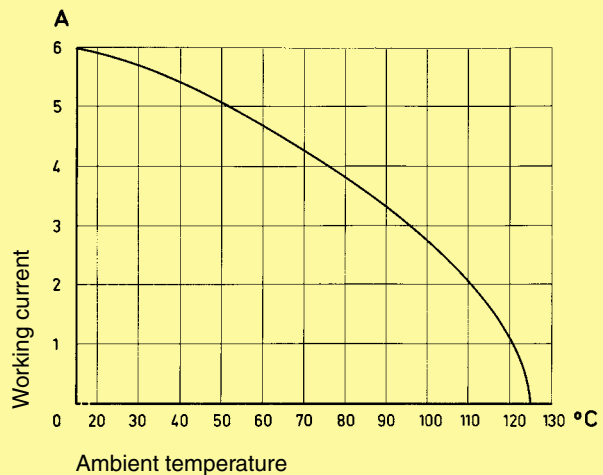

Heavy duty section

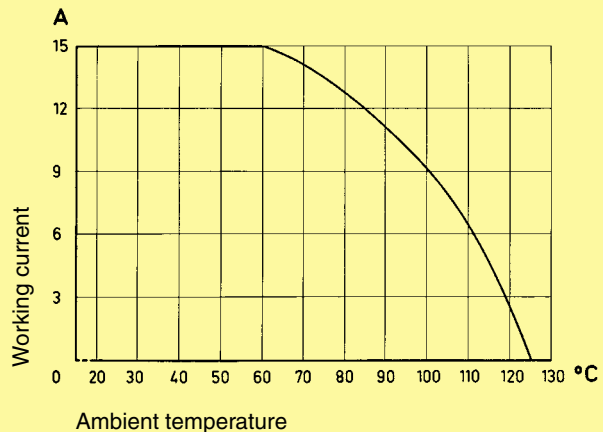

DIN Power to 15 A