

5

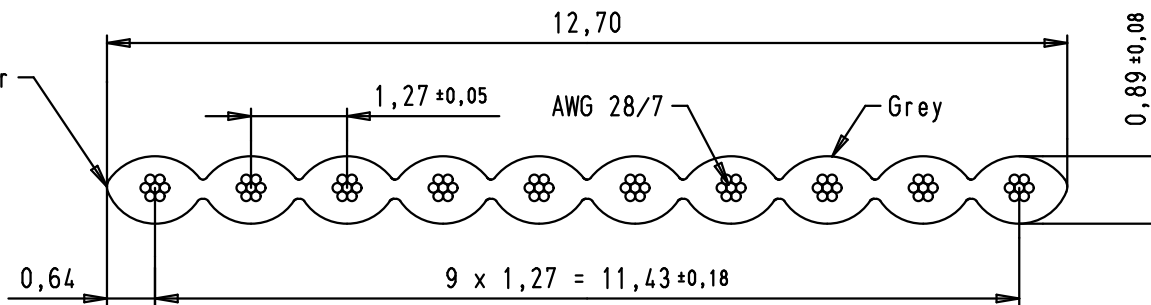
4

3



2

1

Edge mark on first conductor



Wire _____ Tinned copper
 Gauge _____ AWG 28/7 0,089 mm²
 Voltage rating _____ 300 Vr.m.s
 Current rating _____ 1,3 A at 10°C rise above ambient
 Capacity unbalanced _____ 45,9 pF/m at 1 MHz
 Impedance unbalanced _____ 105 Ω
 Propagation delay _____ 4,9 ns/m nominal
 Insulation material _____ PVC
 Temperature rating _____ -20°C (operating) to +105°C
 _____ -30°C (static)
 Flammability rating _____ Flame retardant VW1
 Insulation resistance _____ 10 000 MΩ/km
 Approval _____ UL AWM style 2651

				Dot.	Name	 All Dim. in mm Orig. Size DIN A 4	SEK 18 flat cable 10 poles	Moßstab/ Scale
			Detail.	20/10/05	JMDR			10:1
			Insp.					
			Stand.					
09 18 010 7004	100 m (328 feet)	34400	17/09/07	PK	HARTING EURL F-95972 Paris		TB 09 18 010 700X	Blatt/ Page
09 18 010 7001	30,48 m (100 feet)	33246	20/10/05	JMDR			Sub.	1/1
Part number	Length per reel	Mod.	Dot.	Name				

D

C

B

A