





PUSH WIRE® Connectors for Junction Boxes 273 Series


0.75 - 1.5 mm ² "s" ① AWG 18 - 16 "s" 400 V/4 kV/2 ③ 600 V, 20 A [Ⓜ] I _N 18 A 600 V, 10 A [Ⓜ]	0.75 - 1.5 mm ² "s" ① AWG 18 - 16 "s" 400 V/4 kV/2 ③ 600 V, 20 A [Ⓜ] I _N 18 A 600 V, 10 A [Ⓜ]	1 - 2.5 mm ² "s" ② AWG 14 - 12 "s" 400 V/4 kV/2 ③ 600 V, 20 A [Ⓜ] I _N 24 A 600 V, 20 A [Ⓜ]
 10 - 13 mm / 0.45 in ④	 10 - 13 mm / 0.45 in ④	 10 - 13 mm / 0.45 in ④




Color	Item No.	Pack. Unit	Color	Item No.	Pack. Unit	Color	Item No.	Pack. Unit
PUSH WIRE® connector for junction boxes, 3-conductor connector			PUSH WIRE® connector for junction boxes, 8-conductor connector			PUSH WIRE® connector for junction boxes, 2-conductor connector		
● gray	273-100	1000	● gray	273-108	500	● dark gray	273-112	1000
● transparent	273-153	1000	● transparent	273-158	500	● transparent	273-252	1000

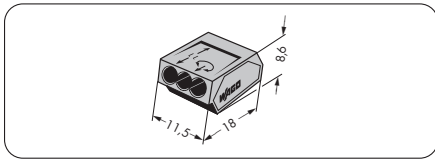

Dimensions in mm

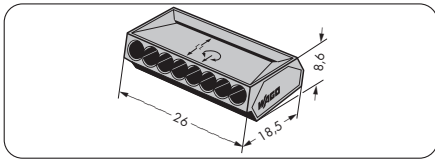


Dimensions in mm

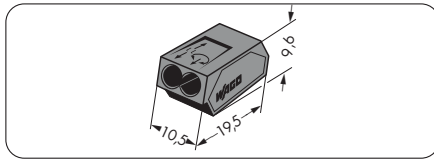


Dimensions in mm



Color	Item No.	Pack. Unit	Color	Item No.	Pack. Unit
PUSH WIRE® connector for junction boxes, 5-conductor connector			PUSH WIRE® connector for junction boxes, 3-conductor connector		
● gray	273-101	1000	● dark gray	273-104	1000
● transparent	273-155	1000	● transparent	273-253	1000

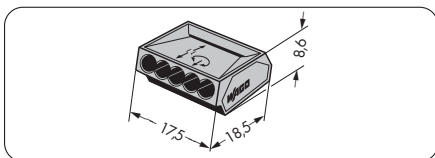


Dimensions in mm

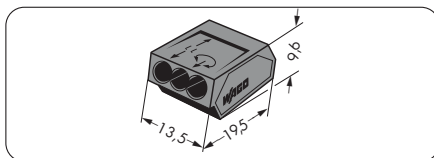

Dimensions in mm

Mounting Carrier for PUSH WIRE® Connectors for DIN 35 Rail or Screw Mount 273 Series

Mounting carrier

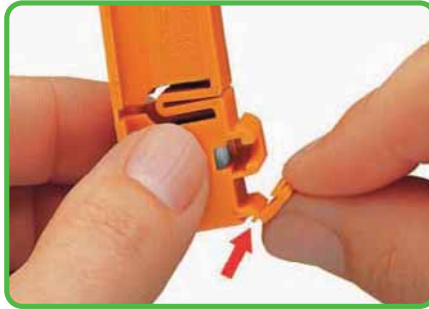

Snap off cover.



Cover use as end plate.

Color	Item No.	Pack. Unit
Mounting carrier		
orange	273-150	50 (5x10)

Item-Specific Accessories		
Self-adhesive marking strips, plain, Height of marking strip: 5 mm, 48 self-adhesive strips per card	white	210-334 1



Snapping on to carrier rail.



Removing from the carrier rail.



FIXED IN POSITION - screw fixing



FIXED IN POSITION - on a DIN 35 rail

One single carrier can hold up to 15 clamping units in a very narrow space. Previously, this was only possible using rail-mount terminal blocks.

The advantages for you are:

- The carriers are DIN 35 rail- or screw-mounted easily and quickly.
- A carrier can hold up to three 1.5 mm² (AWG 16) or 2.5 mm² (AWG 12) 273 Series connectors (excluding the 8 x 1.5 mm² version).
- The connectors can be easily exchanged.
- Large marking area for self-adhesive marker strips or for direct marking with permanent felt-tip pen.